

# LED WALL PACK

Outdoor Wall PackLight


# JAMES®



The LED Wall Pack lights are durable and dependable outdoor lights. Ideally the perfect choice for enhancing building exteriors or used as perimeter lighting to enhance heightened security.



## DIMENSIONS

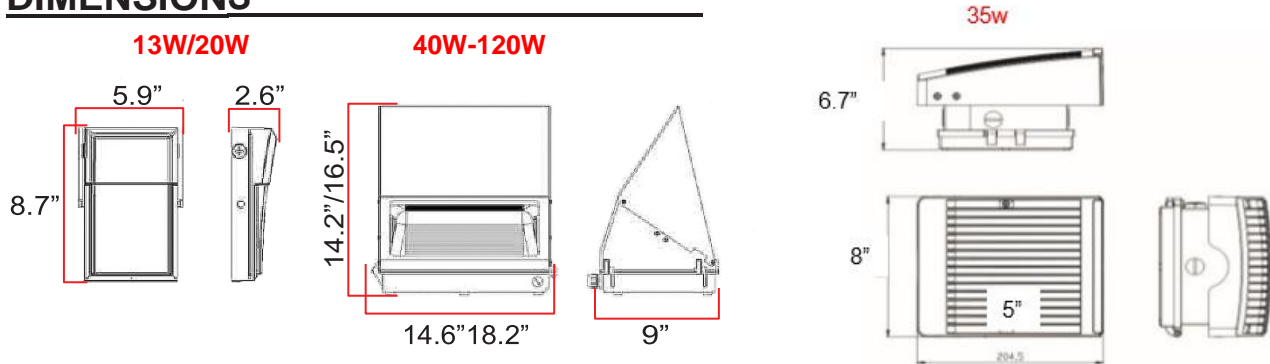

## FEATURES

- Stainless steel clips
- Optional 100% DR lens additive for impact resistance
- Built-in Constant Current LED Driver with High Efficient LED Module
- Suitable for surface mount
- Suitable for damp or dry environments
- Minimize labor and recycling costs
- Excellent light distribution and uniformity
- *Rated IP65*
- 5 Year Manufacturer's Warranty

## COMMON TECHNICAL DATA

Color Temperature	3000K-5000K
Beam Angle	110° degrees
Color Consistency	4 steps
CRI	More than 80
Operation Temperature	-20° C to 45°C
Efficiency	More than 100LPW
Input Voltage	AC100-277V
Frequency	50-60Hz
Power Factor	More than 0.99
Rated Life	50,000 hours
LED Type	SMT 2835
Housing	Aluminum & Plastic

## WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. James® does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. James® reserves the right to alter specifications without prior notice.

## PRODUCT SPECIFICATION

Product Number	Watt	CCT	Lumens	Housing	Dimensions (inch) Length x Width x Height
ZY-SWP-13W	13W	3000K-5000K	1495	Aluminum&Plastic	5.9"x 2.6"x 8.7"
ZY-SWP-20W EV-WP03-20WC1	20W	3000K-5000K	2300	Aluminum&Plastic	5.9"x 2.6"x 8.7"
EV-WP05-35WAT1A1	35W	3000K-5000K	4200	Aluminum& Plastic	8"x 6.7"x 5"
AE-SWP-40W	40W	3000K-5000K	4750	Aluminum & Plastic	14.6"x 9"x 14.2"
ZY-SWP-60W	60W	3000K-5000K	7000	Aluminum & Plastic	14.6"x 9"x 14.2"
ZY-SWP-80W	80W	3000K-5000K	9800	Aluminum & Plastic	18.2"x 9"x 16.5"
ZY-SWP-100W AE-SWP-100W	100W	3000K-5000K	12300	Aluminum & Plastic	18.2"x 9"x 16.5"
ZY-SWP-120W AE-SWP-120W	120W	3000K-5000K	14700	Aluminum & Plastic	18.2"x 9"x 16.5"
ZY-WP-45W27	45W	3000K-5000K	4800	Aluminum & Plastic	14'x8.2'x5'
ZY-WP-70W27	70W	3000K-5000K	7100	Aluminum & Plastic	14'x8.2'x5'

## ORDERING GUIDE

ZY/AE/EV Company Code	SWP/WP Housing Type	13W/20W/30W/40W/60W/80W/100W/120W Wattage
--------------------------	------------------------	--




## MOUNTING OPTIONS

### OPTION 1:

1. Rotate the three mounting kits to the proper angle.

2. Put the fixture against the wall and make the marks according to the kit. Drill holes.

3. Insert the wall anchors into the drilled holes and line the fixture to the wall and screw insecure.

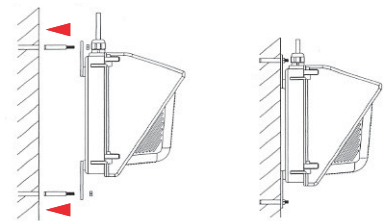




### OPTION 2:

1. Take apart the PC cover and fixture housing.

2. Put the fixture on the wall and drill three holes.

3. Get expansion screws into the holes, match the fixture to the bolts and screw into the wall. Assemble the PC cover and fixture housing back together.



# LED WALL PACK

